



● Features

- High resistance value
- High reliability

● Applications


- The NSW series has been developed to be introduced in automotive ignition systems to reduce Radio frequency interference (RFI)
- Which are caused during electrical discharges on petrol engines in both cars and motorcycles. In order to meet the current legislation in force to reduce these disturbances, the introduction of these noise suppressor resistors in the rotor of the distributor or the spark plug leads can ensure compliance.

● Construction



①	②	③
Copper cap	Glassfiber	Alloy wire

● Dimensions

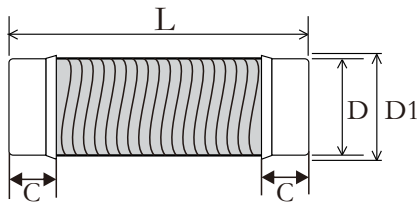

Type	Power	L(±0.3) mm	D(max) mm	D1(±0.1) mm	C±0.2 mm
NSW	1/2WA	7.9	4.35	4.45	3.1
	1/2WB	11.0	4.35	4.45	3.1
	1/2WC	11.0	4.30	4.60	3.1
	1W	14.5	4.35	4.45	3.1
	2WA	18.0	4.75	4.90	3.1
	2WB	18.0	4.65	4.90	3.1
	2WC	18.0	4.35	4.90	3.1
	2WD	21.0	4.35	4.60	3.1
	2WE	23.7	4.65	4.90	3.1

● Ordering Information

Example:

NSW	3	K	1K0
(1)	(2)	(3)	(4)
Series Name	Power Rating	Resistance Tolerance	Resistance Value

(1)Style:NSW SERIES

(2)Power Rating: 1/2WA=1/2WA、1/2WB=1/2WB 1/2WC=1/2WC、1W=1W、2WA=2WA.....

(3)Tolerance: K= ± 10%、M= ± 20%

(4)Resistance Value:100R00=100Ω、1K0=1K、5K0=5K、10K0=10K

● Reference Standards

JIS C 5201-1

Applications And Ratings

Type	Power	Resistance Value	Resistance Tolerance	Typical Inductance
NSW	1/2WA	100Ω~10KΩ	± 5% ± 10% ± 20% ± 20%	MIN 9μH at freq.1Mhz
	1/2WB			
	1/2WC			
	1W			
	2WA	100Ω~15KΩ		
	2WB			
	2WC			
	2WD			
	2WE			

Performance Characteristics

Test Item	Specifications	Test Methods
Short Time Overload	$\Delta R \leq (2\%R + 0.05\Omega)$	5PR,5sec
Inductance	MIN 9μH	at freq.1Mhz
T C R	$\pm 150\text{ppm}/^\circ\text{C}$	---
Load Life	$\Delta R \leq (5\%R + 0.1\Omega)$	70°C,PR1000h
Terminal Tensile Strength	$\Delta R \leq (1\%R + 0.05\Omega)$	6kg,30s
High Voltage Pulses At High Frequency	$\Delta R \leq (1\%R + 0.05\Omega)$	15kv to 20kv continuous pulses 0.1ses ON&0.1 ses OFF in series with spark plug-duration 3hrs
Operating Temperature Range	-40°C to 250°C	---
Dielectric Strength	$\Delta R \leq (1\%R + 0.05\Omega)$	25kv continuously 30kv,10 minutes

Typical Frequency Response

