


## ● Feature


- (Standard Resistance Range): 10Ω-2MΩ
- (Resistance Tolerance): ± 5% , ± 10%
- (Terminal Resistance): ≤ 1%R or 2Ω
- (Contact Resistance Variation): ≤ 3%R or 3Ω
- (Insulation Resistance): R1 ≥ 1GΩ
- (Withstand Voltage): 101.3kPa 600V 8.5kPa 250V
- (Effective Electrical Travel): 12 ± 2(cycles)

## ● Dimensions


### 3262P

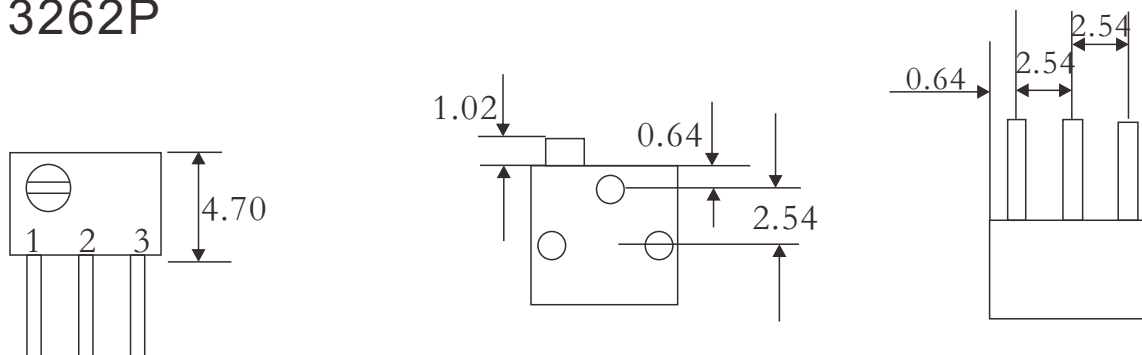

### 3262X

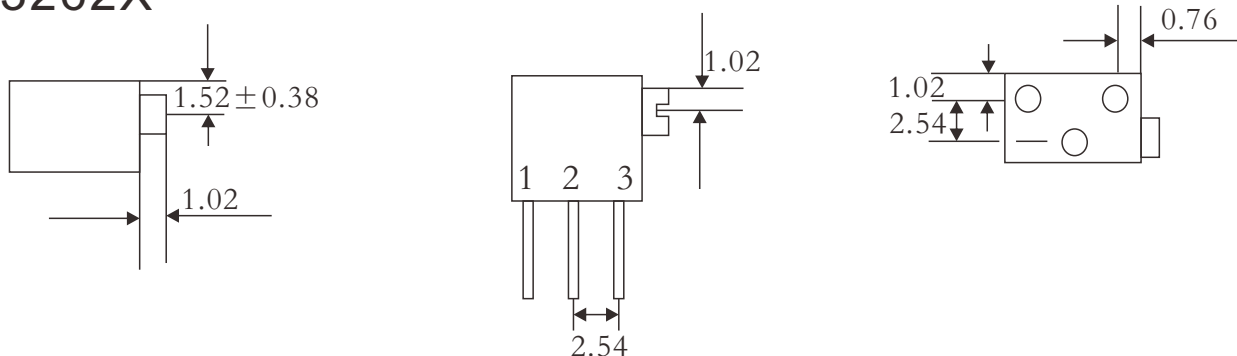

### 3262W

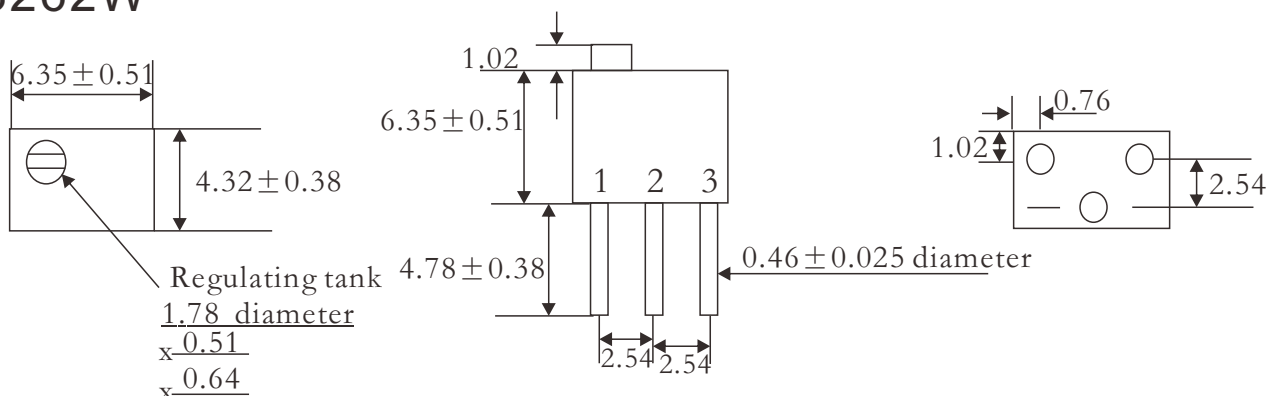

## Reference Standards

JIS C 5201-1

## Ordering Information

Example:

3362	0.5	B	C	10R0
(1)	(2)	(3)	(4)	(5)
Series Name	Power Rating	Resistance Tolerance	TCR	Resistance

- (1)Type: 3362P,3362X,3362W SERIES  
 (2)Power Rating: 0.25=0.25W  
 (3)Tolerance: J=±5%,K=±10%  
 (4)TCR: ±100ppm/°C;±250ppm/°C;  
 (5)Resistance Value:10R0=10R、10K00=10KΩ

## Power And Resistance etc

Type	Power(W)	Resistance Range(Ω)	Tolerance Range	TCR PPM/°C	MaxWorking Voltage(V)	Operating Temperature
3362	0.25W	10Ω~2MΩ	±5%~±10%	±100ppm/°C ±250ppm/°C	200V	-55°C ~+125°C

## Performance

(Rated Power):	+70°C 0.5W;+125°C 0W
(Temperature Range) :	-55°C +125°C
(Temperature Coefficient):	±250、±100ppm/°C
(Temperature Variation) :	$\Delta R \leq \pm 2\%R$ , $\Delta(U_{ab}/U_{ac}) \leq \pm 1\%$
(Collision):	390m/s <sup>2</sup> , 4000 das Mal $\Delta R \leq \pm 1\%R$
(Vibration):	10~500HZ, 0.75mm or 98m/s <sup>2</sup> ,6h $\Delta R \leq \pm 1\%R$ , $\Delta(U_{ab}/U_{ac}) \leq \pm 2\%$
(Climate Category):	$\Delta R \leq \pm 3\%R$ , $R1 \geq 100M\Omega$
(Electrical Endurance at 70°C):	0.25W、1000h、 $\Delta R \leq \pm 3\%R$
(Mechanical Endurance)	200(cyclesk) $\Delta R \leq \pm 3\%R$
(Steady Damp-heat):	$\Delta R \leq \pm 3\%R$ , $R1 \geq 100M\Omega$
(Total Machanical Travel)	12±2(cyclesk)
(Staring Torque)	≤25mN.m
(Clutch Torque)	≤25mN.m